

INSTALLATION GUIDE



1530-DH Double Clamp Ladder Rack

Sprinter Universal Wheelbase (Aluminum)



QUICK START GUIDE

Phase 1 - Assembly


❑ 1.1 Setup.....	3 - 5
❑ 1.2 Ladder Rack Assembly.....	6 - 15

Phase 2 - Installation

❑ 2.1 Mounting Tracks Preparation for Ladder Rack with 3 rd Crossbow.....	16 - 17
❑ 2.2 Mounting Tracks Preparation for Ladder Rack without 3 rd Crossbow.....	18 - 19
❑ 2.3 Mounting Tracks Installation.....	20 - 21
❑ 2.4 Ladder Rack Installation.....	21 - 24
❑ 2.5 Note.....	25

REQUIRED ITEMS

NOTE: Use Sawhorses if possible, or use the box as a flat protective surface on the ground or table.

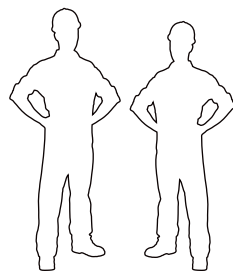


**2
PERSONS**

- ❑ Cordless Impact
- ❑ Ratchet
- ❑ Tape Measure
- ❑ Mallet
- ❑ Marker
- ❑ Ladder
- ❑ Cutter
- ❑ 1/2" Socket
- ❑ Sawhorse (Optional)
- ❑ Box
- ❑ Knife
- ❑ 1/2" Wrench
- ❑ Silicone

PHASE 1 – ASSEMBLY

1.1 SETUP

1.1.1 Unpack components; compare with the bill of materials.

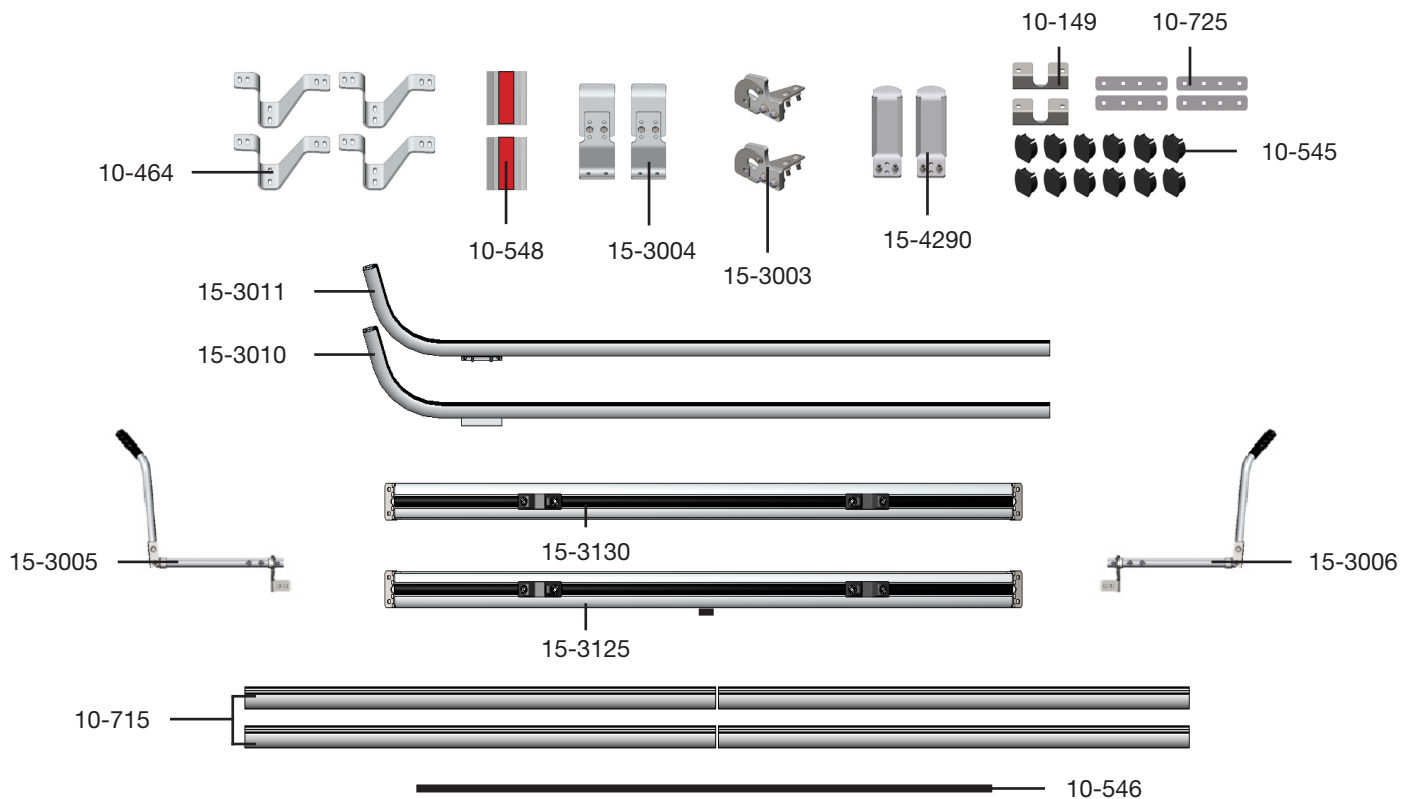























1.1.2 Verify all parts are present.


BILL OF MATERIALS

Item No.	Description	Qty.
10-149	Clamp Handle Support	2
10-464	“V” Foot	4
10-545	Ski Plastic Plug	12
10-546	Track Plug Extrusion (QTY in Inches)	48
10-548	Hook Protector (4 - 3/8" L)	2
10-715	Mounting Track	4
10-725	Support Plate	4
15-3003	Ladder Clamp Hasp	2
15-3004	Ladder Clamp Rear Hook	2
15-3005	Ladder Clamp Bar (Driver Side)	1
15-3006	Ladder Clamp Bar (Passenger Side)	1
15-3010	Ski (Left)	1
15-3011	Ski (Right)	1
15-3125	Rear Crossbow	1
15-3130	Front Crossbow	1
15-4290	Front Hook	2
94-1012	Assembly Fastener Kit	1
96-1001	Install Fastener Kit	1

1.1.3 Fastener kits.

94-1012 Fastener Kit			Fastener Assembly
4x		# 90-487 Carriage Bolt 5/16"-18 x 3/4" SS304	4x <div> #90-487 Carriage Bolt 5/16" x 3/4"  #98-117 Flat Washer  #98-123 Lock Washer  #94-105 Hex Nut</div>
22x		# 90-491 Carriage Bolt 5/16"-18 x 1" SS304	20x <div> #90-491 Carriage Bolt 5/16" x 1"  #98-117 Flat Washer  #98-123 Lock Washer  #94-105 Hex Nut</div>
30x		# 94-105 Hex Nut 5/16"-18 SS316wax	
2x		# 98-160 Spacer SS18-8	4x <div> #98-117 Flat Washer  #98-123 Lock Washer  #94-105 Hex Nut</div>
30x		# 98-117 Flat Washer 5/16", O.D 3/4" SS18-8	
30x		# 98-123 Lock Washer Regular 5/16" SS304	2x <div> #90-491 Carriage Bolt 5/16" x 1"  #98-160 Spacer  #98-117 Flat Washer  #98-123 Lock Washer  #94-105 Hex Nut</div>

96-1001 Fastener Kit



Fastener Assembly

8x



90-491

Carriage Bolt
5/16"-18 x 1"
SS304

16x



90-495

Carriage Bolt
5/16"-18 x 1-1/4"
SS304

8x



94-105

Hex Nut
5/16"-18
SS316wax

16x



94-116

Serrated Nut
5/16"-18
ZINC

16x



98-109

Flat Washer
SAE 3/8"
SS304

8x



98-117

Flat Washer
5/16", OD 3/4"
SS18-8

8x



98-123

Lock Washer
5/16"
SS304

16x



98-149

Spacer
0.290" ID x 1.375" OD x 0.125" L
NEOPRENE

8x



#90-491 Carriage Bolt 5/16" x 1"



#98-117 Flat Washer



#98-123 Lock Washer



#94-105 Hex Nut

16x

RANGER DESIGN TRACKS ONLY



#90-495 Carriage Bolt 5/16" x 1-1/4"



#98-109 Flat Washer



#98-149 Neoprene Spacer




#94-116 Serrated Nut

PHASE 1 – ASSEMBLY

1.2 LADDER RACK ASSEMBLY

1.2.1 Peel the backer off of the adhesive on the hook protector, then attach the hook protector to the upper rear hook.



2x

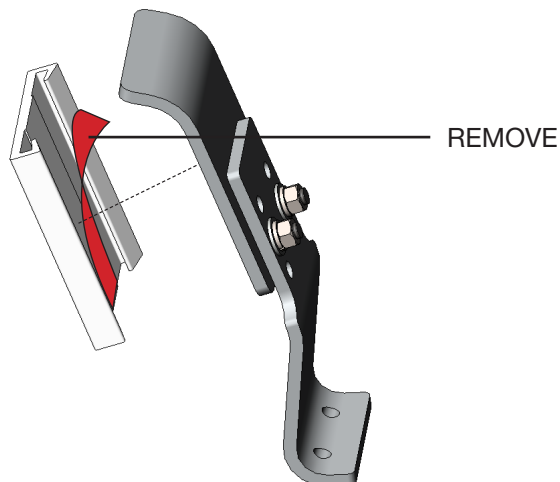

TOOLS

- ☐ Knife

1.2.2 Attach the rear hooks to the ladder clamps, with the pre-assembled hardware on the pivot bars.

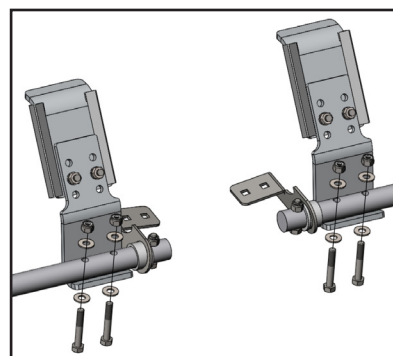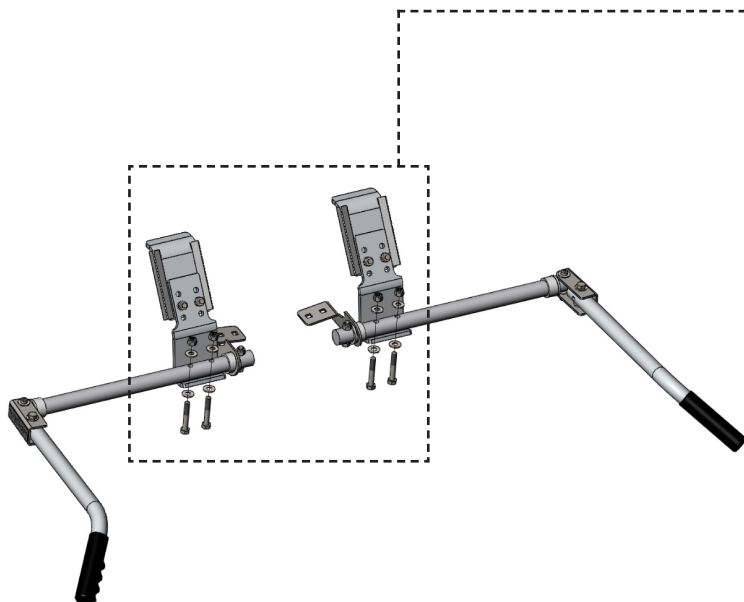

TOOLS

- ☐ Cordless Impact
- ☐ 1/2" Socket
- ☐ 1/2" Wrench

HARDWARE USED

4x HARDWARE IS PRE-ASSEMBLED.



#90-225 Hex Bolt
5/16" - 18 x 2" SS304



#98-117 Flat Washer



#98-117 Flat Washer



#94-111 Lock Nut

1.2.3 Slide carriage bolts on the bottom face of the crossbows.

NOTE: The track plug must be removed from the underneath of the crossbows, and reinstalled after the feet have been installed in the final position.


TIPS: Use tape to keep the bolts from sliding off.



DRIVER SIDE

Front crossbow

- Slide 4 pcs. of 1" carriage bolts.

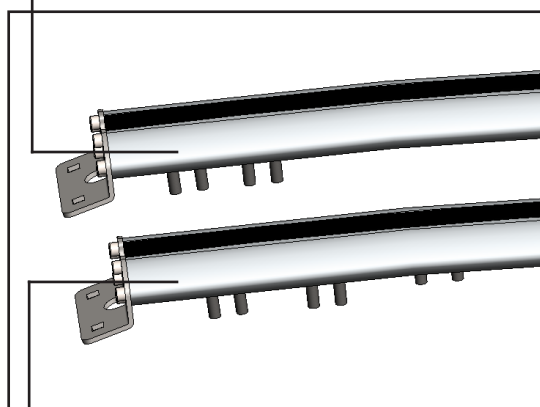

Rear crossbow

- Slide 2 pcs. of 3/4" carriage bolts.
- Slide 4 pcs. of 1" carriage bolts.

HARDWARE USED

2x



#90-487 Carriage Bolt
5/16" x 3/4" SS304

8x




#90-491 Hex Bolt
5/16" x 1" SS304

PASSENGER SIDE

Front crossbow

- Slide 4 pcs. of 1" carriage bolts.

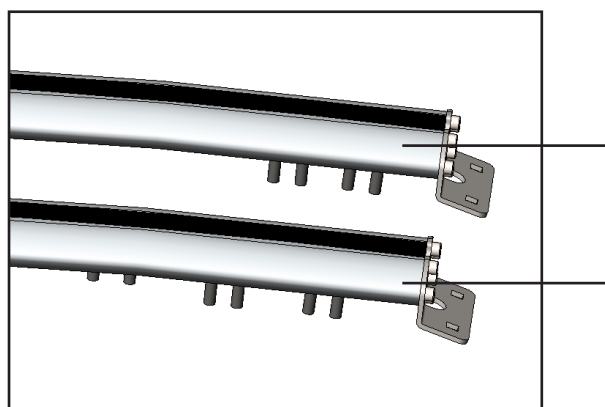

Rear crossbow

- Slide 2 pcs. of 3/4" carriage bolts.
- Slide 4 pcs. of 1" carriage bolts.

HARDWARE USED

2x



#90-487 Carriage Bolt
5/16" x 3/4" SS304



8x



#90-491 Hex Bolt
5/16" x 1" SS304

1.2.4 Install the feet on the front, and rear crossbows.

NOTE: The more slanted side of the V foot should be closer to the center of the crossbow.

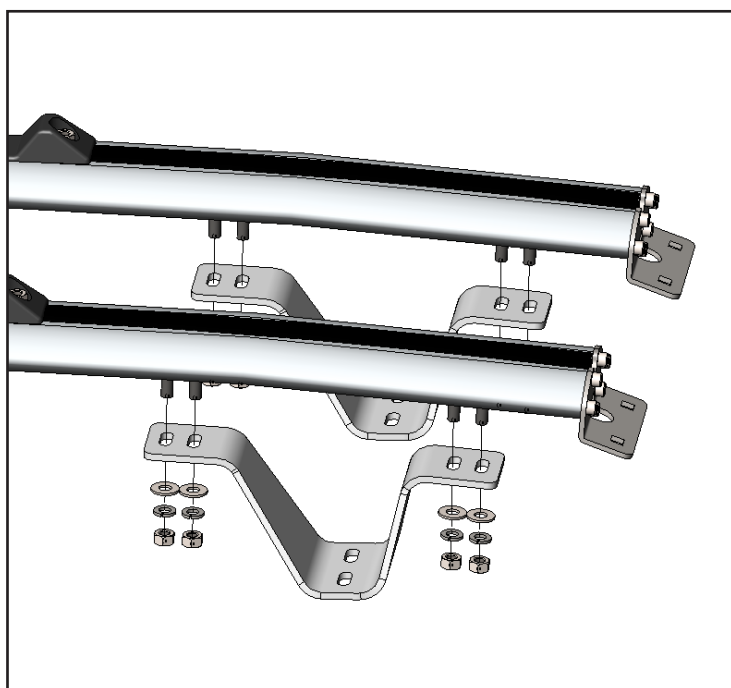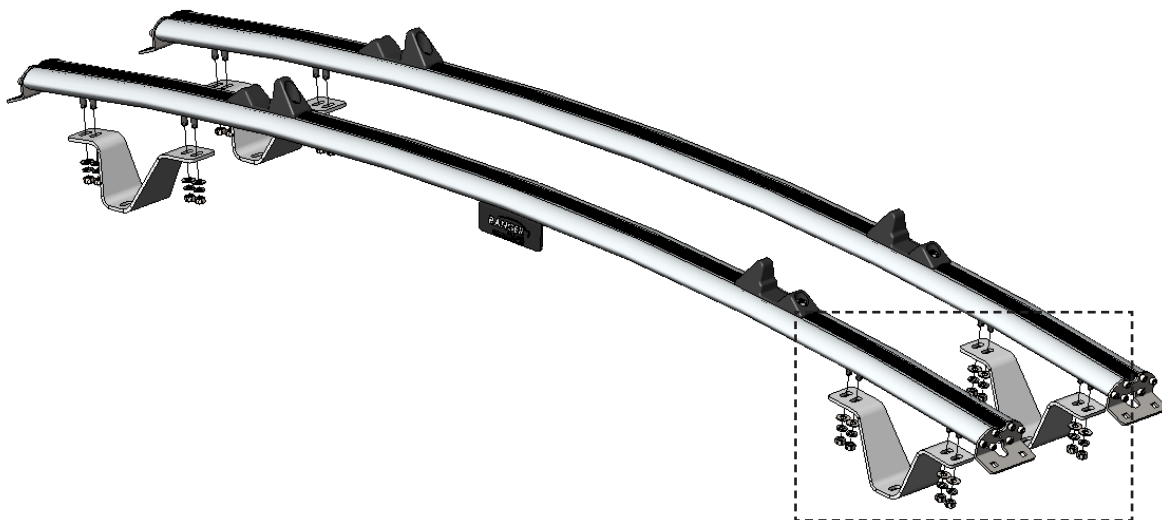

HARDWARE USED

16x HAND-TIGHTEN THE NUTS.



Carriage bolts are already on the crossbows.



#98-117 Flat Washer





#98-123 Lock Washer



#94-105 Hex Nut

1.2.5 Fasten the ladder clamp assemblies to the rear crossbow.

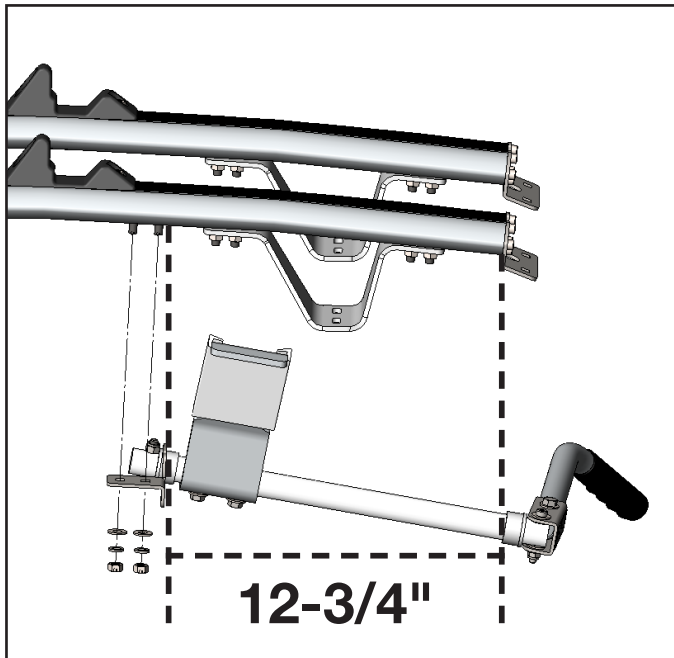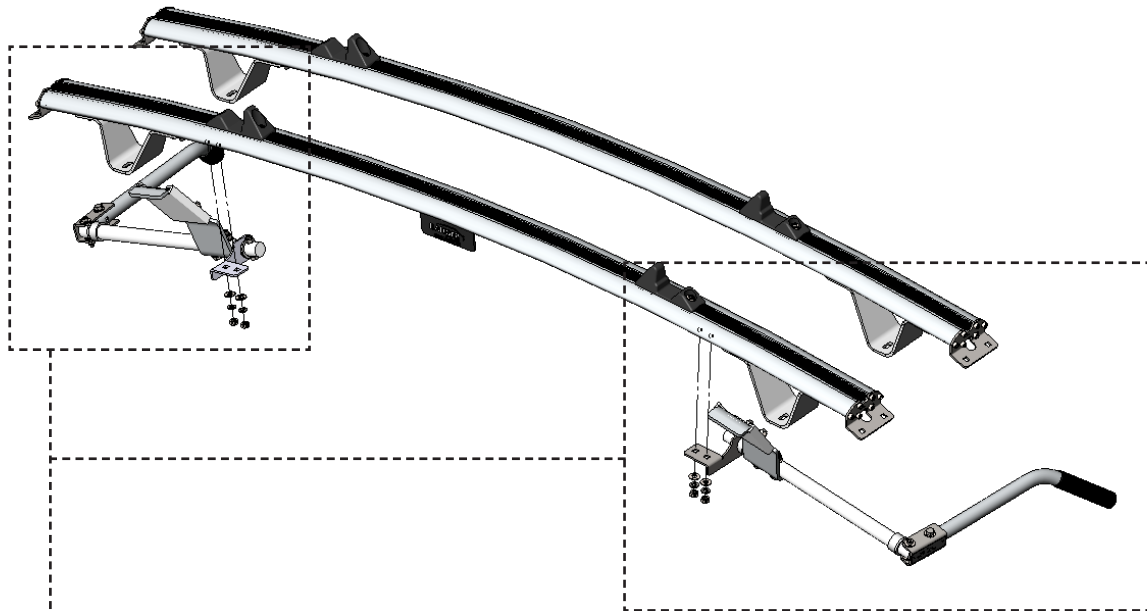

TOOLS

- ☐ Cordless Impact
- ☐ 1/2" Socket
- ☐ Tape Measure
- ☐ Marker

HARDWARE USED

4x



Carriage bolts are already on the crossbows.



#98-117 Flat Washer





#98-123 Lock Washer



#94-105 Hex Nut

- 1.2.6**
- Pull out the 14.5" track plug on both ends of the front crossbow.
 - Loosen the pre-assembled hardware on the front hooks and slide the hooks onto the front crossbow to the position shown below.
 - Cut the track plug, then attach it back to the crossbow.

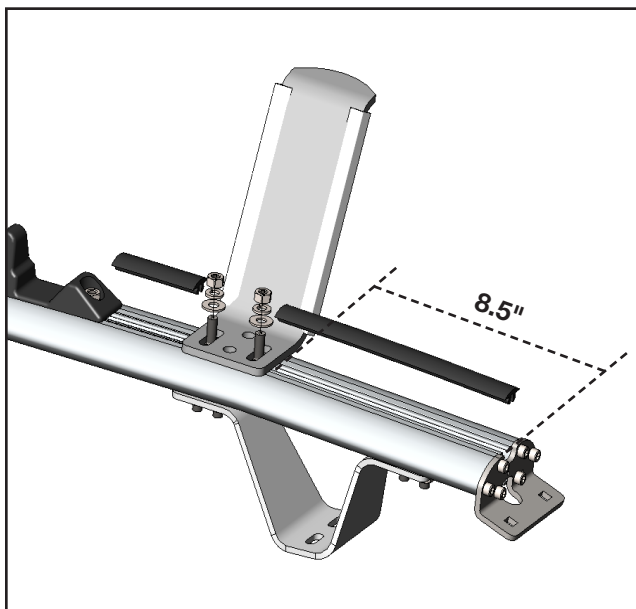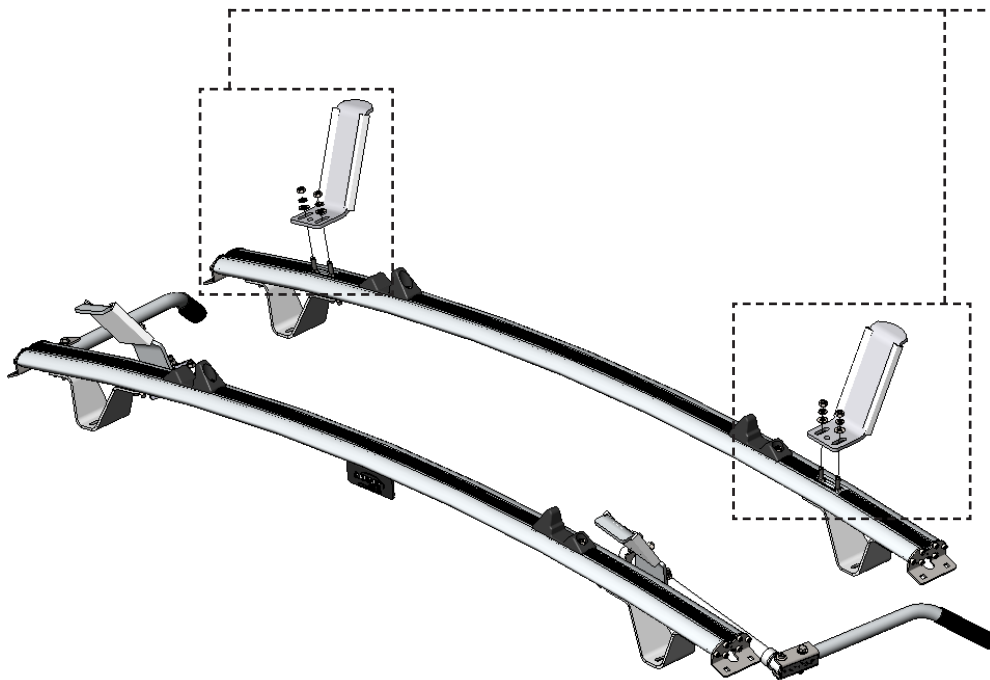





Tighten the nuts just to hold the front hook for adjustment.

TOOLS



- ☐ Marker
- ☐ Cutter

HARDWARE USED

4x HARDWARE IS PRE-ASSEMBLED.

- | | |
|---|----------------------------------|
|  | #90-491 Carriage Bolt 5/16" x 1" |
|  | #98-117 Flat Washer |
|  | #98-123 Lock Washer |
|  | #94-105 Hex Nut |

1.2.7 Install the left and right Skis to the end brackets of the front crossbow.

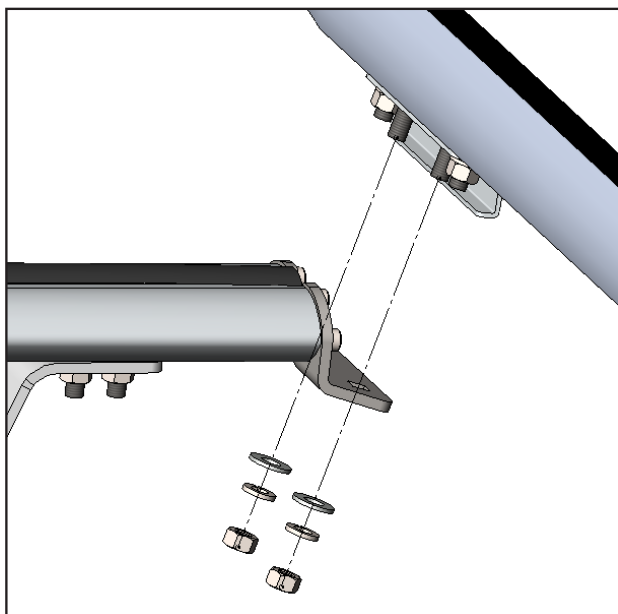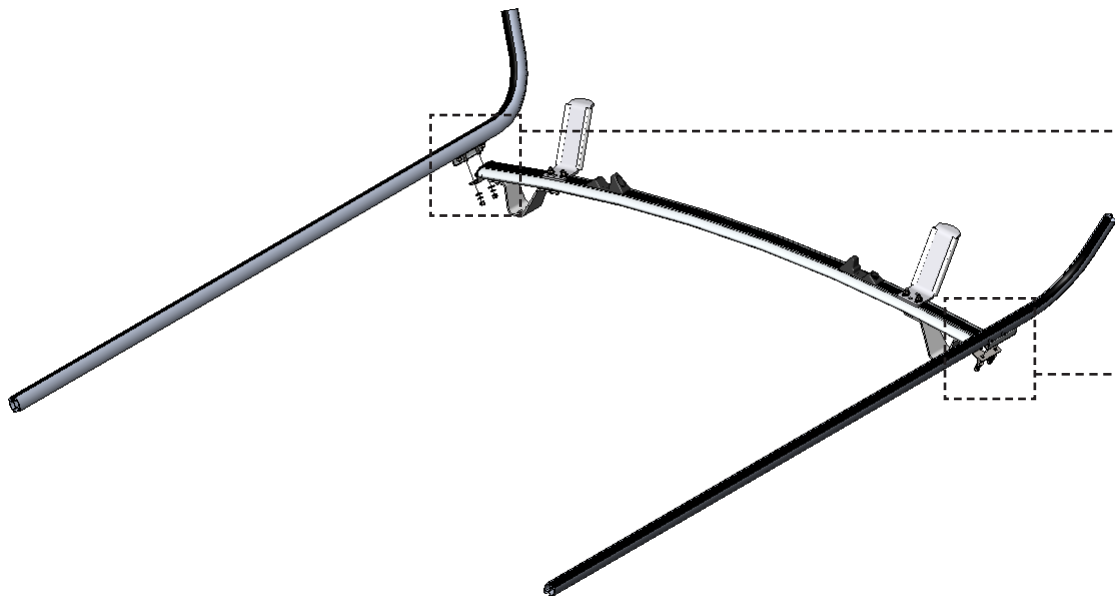

TOOLS

- Cordless Impact
- 1/2" Socket

HARDWARE USED

4x



Carriage bolts are already on the ski.



#98-117 Flat Washer



#98-123 Lock Washer





#94-105 Hex Nut

NOTE: If you have a third crossbow, stop here and open the third crossbow box and follow the installation guide to assemble the third crossbow.

1.2.8 After assembling the third crossbow attach the third crossbow to the skis.



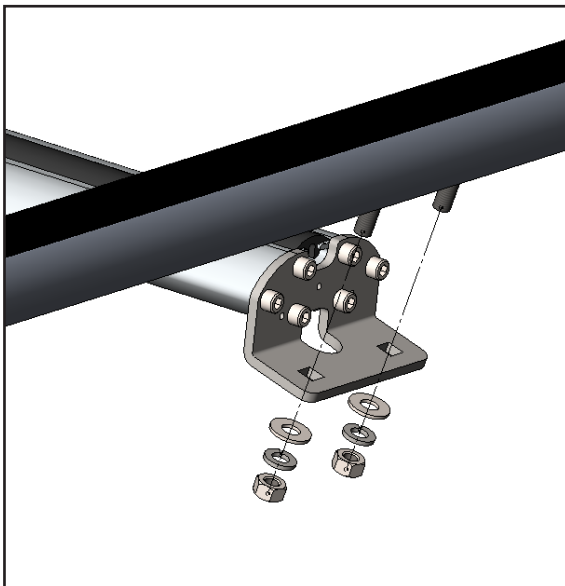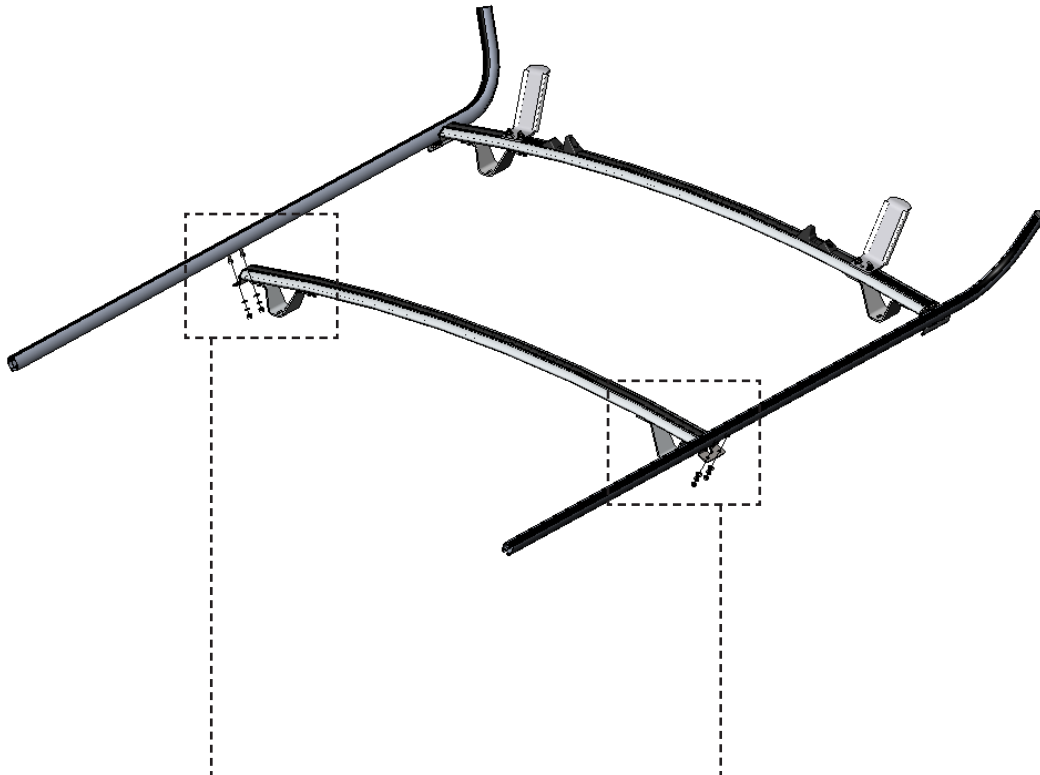

NOTE: Don't do this step if you don't have the third crossbow.



Use the assembly fastener kit of the third crossbow.



HARDWARE USED

4x HAND-TIGHTEN THE NUTS.

- | | |
|---|----------------------------------|
|  | #90-491 Carriage Bolt 5/16" x 1" |
|  | #98-117 Flat Washer |
|  | #98-123 Lock Washer |
|  | #94-105 Hex Nut |

1.2.9 Loosen the pre-assembled hardware on the ladder clamp hasps, slide the hasps on the ski to the position shown below, and tighten the nuts.

THIRD CROSSBOW

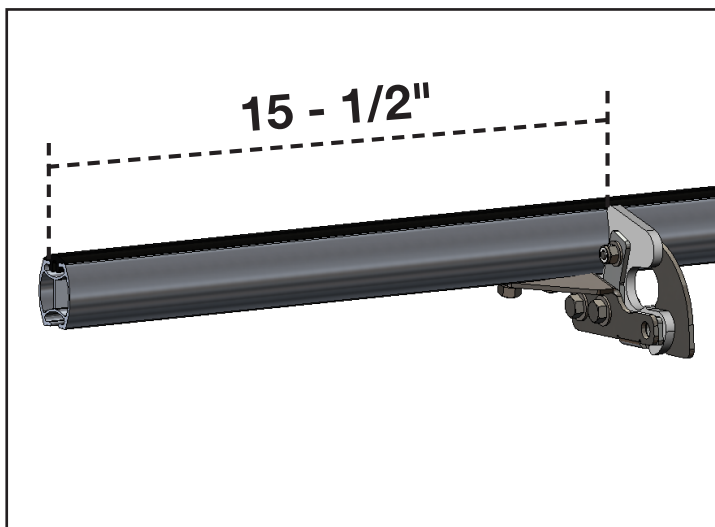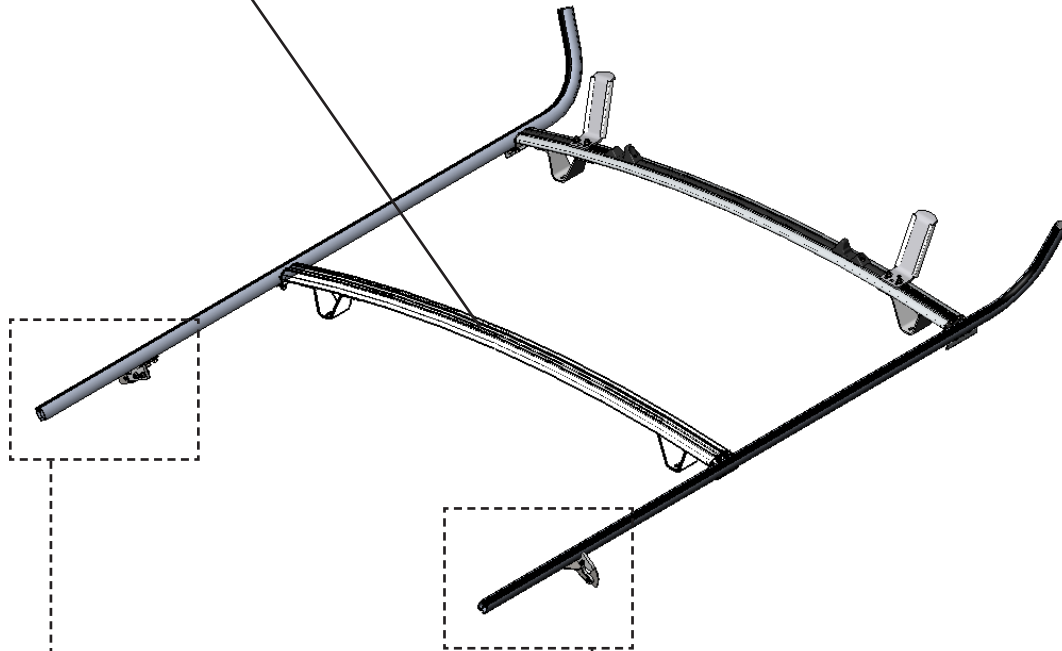

TOOLS

- ☐ Cordless Impact
- ☐ 1/2" Socket
- ☐ Tape Measure
- ☐ Marker

HARDWARE USED


4x HARDWARE IS PRE-ASSEMBLED.



- #90-487 Carriage Bolt 5/16" x 3/4"
- #98-117 Flat Washer
- #98-123 Lock Washer
- #94-105 Hex Nut

1.2.10 Slide 3pcs. of carriage bolts on the rear end of the each ski, then attach end plugs on both ends of the skis.

THIRD CROSSBOW

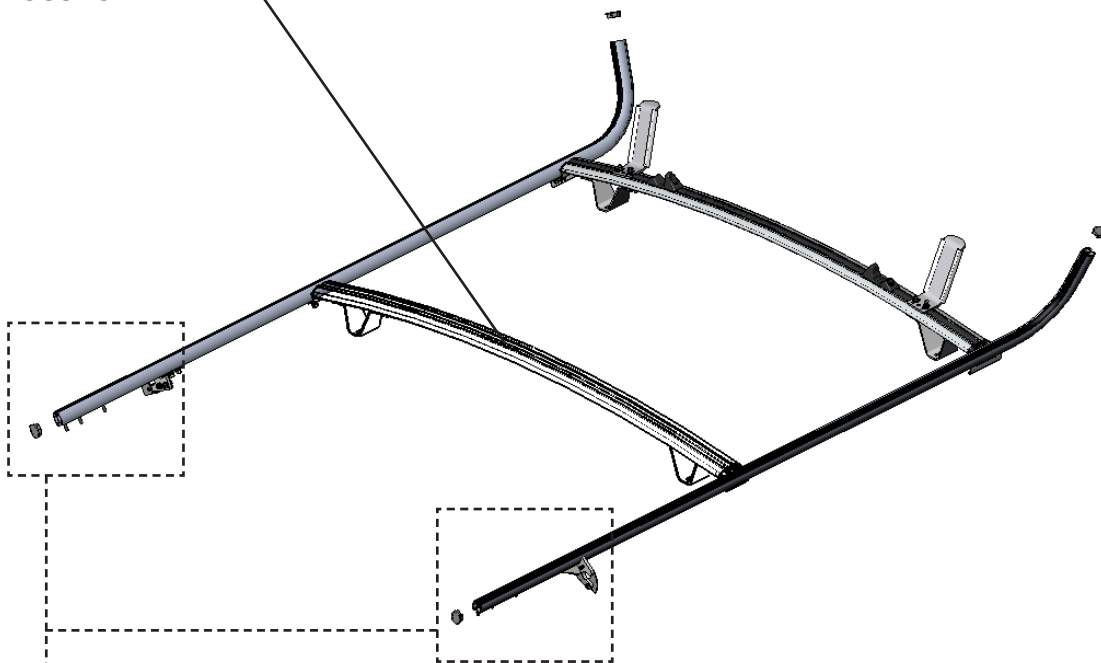

END PLUG



TOOLS

□ Mallet

HARDWARE USED




6x



#90-491 Carriage Bolt
5/16" × 1" SS304

1.2.11 Install the Rear Crossbow to the skis with the clamp handle supports, aligning the rear surface of the crossbow brackets to the rear surface of the skis.

THIRD CROSSBOW

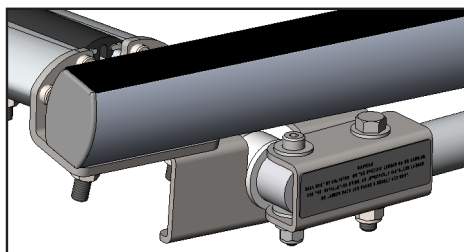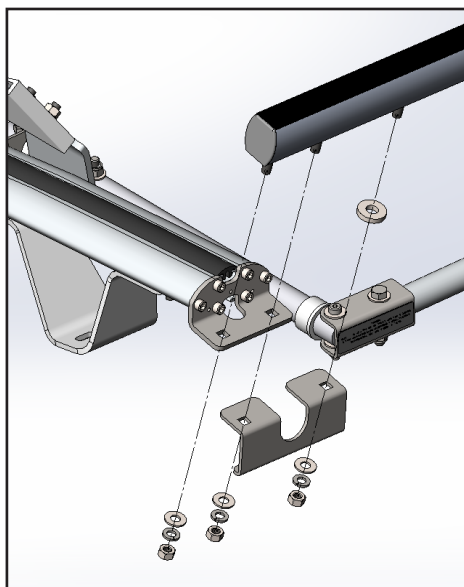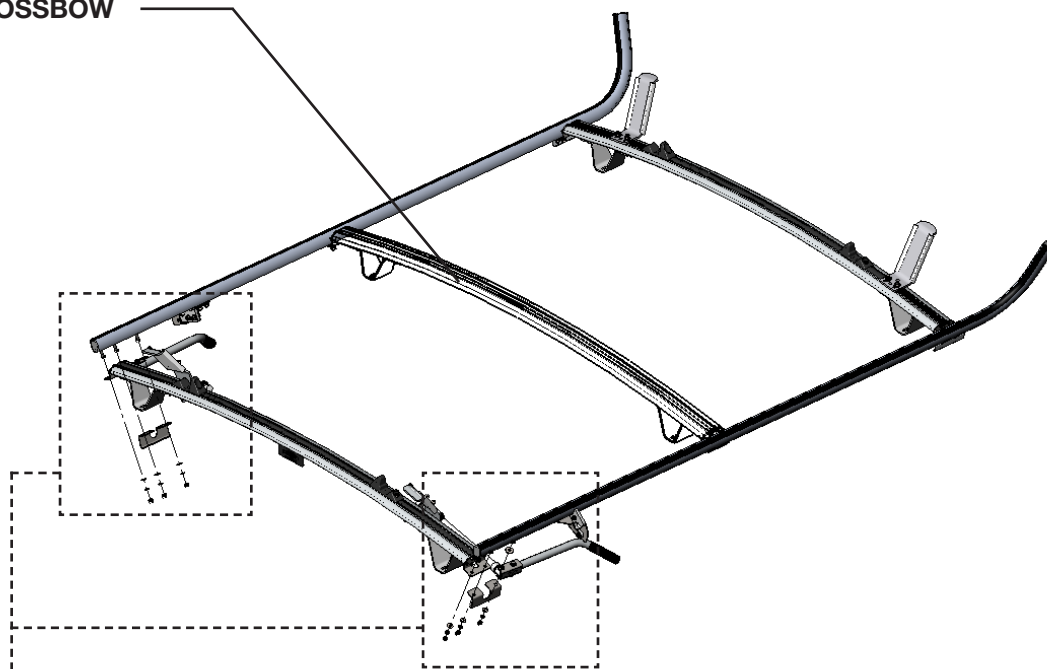

TOOLS

- Cordless Impact
- 1/2" Socket

HARDWARE USED

4x



Carriage bolts are already on the ski.



#98-117 Flat Washer



#98-123 Lock Washer



#94-105 Hex Nut

2x



Carriage bolts are already on the ski.



#98-160 Spacer



#98-117 Flat Washer



#98-123 Lock Washer



#94-105 Hex Nut

PHASE 2 – INSTALLATION


2.1 MOUNTING TRACKS PREPARATION FOR LADDER RACK WITH 3RD CROSSBOW

NOTE: This mounting preparation is for ladder rack with 3RD crossbow only.

2.1.1 Mounting tracks preparation for ladder rack with 3RD crossbow.

Ranger Design Tracks

Regular

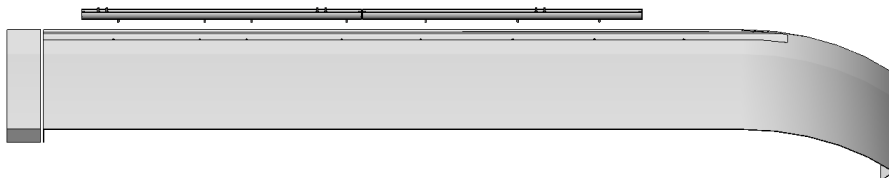


2x

Slide bolts on top and bottom side of the mounting tracks, then attach the end caps on both ends of the mounting tracks.


NOTE: Use the bolts in 96-1020 fastener kit of the 3RD crossbow for the top of the rear tracks.

Rear

Front

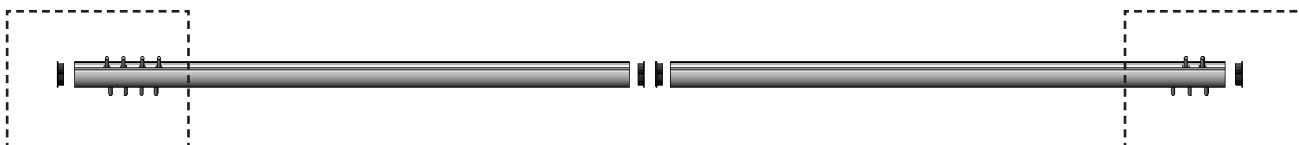

USE THE BOLTS IN 96-1020 FASTENER KIT OF 3RD CROSSBOW

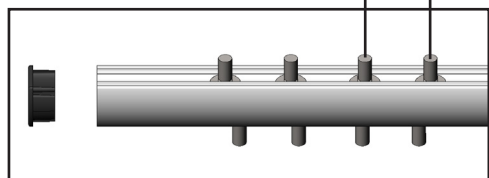

HARDWARE USED

4x TOP




#90-491 Carriage Bolt
5/16" x 1" SS304

4x BOTTOM



#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304

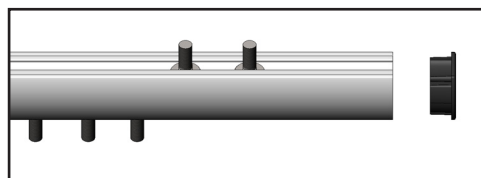

HARDWARE USED

2x TOP



#90-491 Carriage Bolt
5/16" x 1" SS304

3x BOTTOM




#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304

NOTE: This mounting preparation is for ladder rack with 3RD crossbow only.

2.1.2 Mounting tracks preparation for ladder rack with 3rd crossbow.

Ranger Design Tracks

Extended

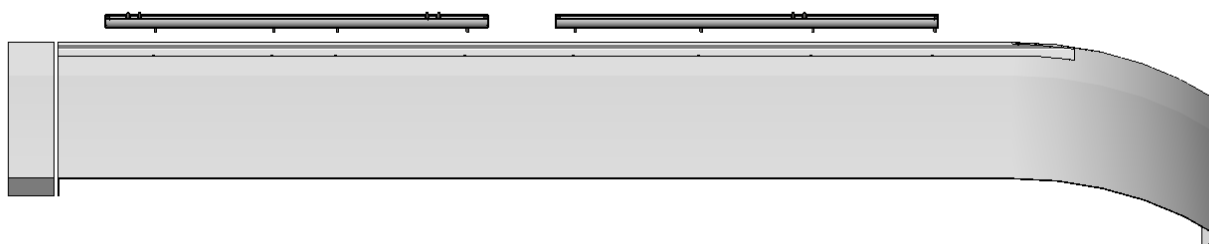

2x

Slide bolts on top and bottom side of the mounting tracks, then attach the end caps on both ends of the mounting tracks.


NOTE: Use the bolts in 96-1020 fastener kit of the 3rd crossbow for the top of the rear tracks.

Rear

Front



USE THE BOLTS IN 96-1020 FASTENER KIT OF 3RD CROSSBOW

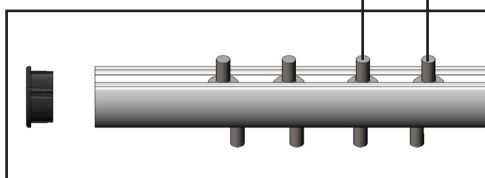

HARDWARE USED

4x TOP




#90-487 Carriage Bolt
5/16" x 3/4" SS304

4x BOTTOM



#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304

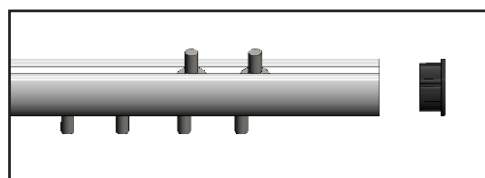

HARDWARE USED

2x TOP



#90-487 Carriage Bolt
5/16" x 3/4" SS304

4x BOTTOM



#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304

PHASE 2 – INSTALLATION


2.2 MOUNTING TRACKS PREPARATION FOR LADDER RACK WITHOUT 3RD CROSSBOW

NOTE: This mounting preparation is for ladder rack without 3rd crossbow ladder rack only.

2.2.1 Mounting tracks preparation for ladder rack without 3rd crossbow.

Ranger Design Tracks

Regular


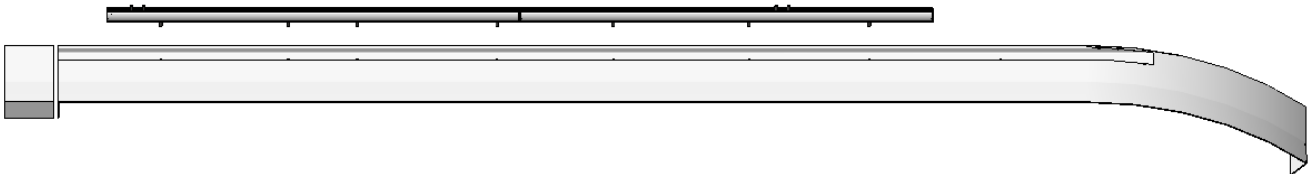


2x

Slide bolts on top and bottom side of the mounting tracks, then attach the end caps on both ends of the mounting tracks.

Rear

Front

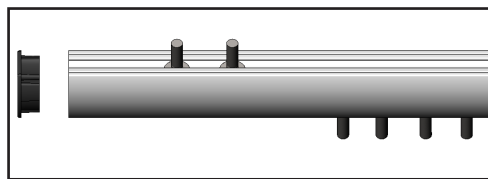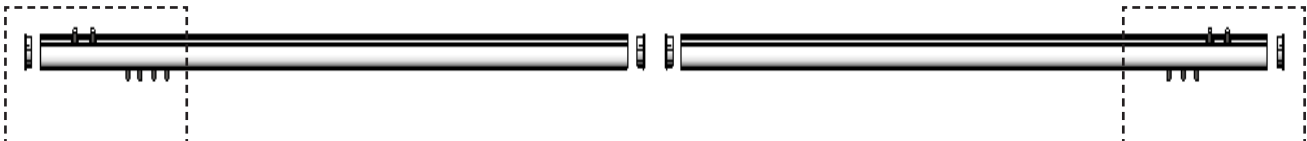

HARDWARE USED

2x TOP




#90-491 Carriage Bolt
5/16" x 1" SS304

4x BOTTOM



#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304

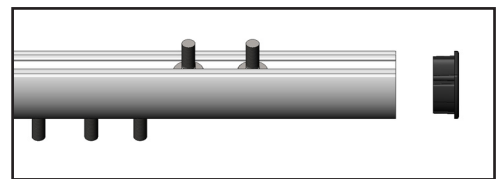

HARDWARE USED

2x TOP



#90-491 Carriage Bolt
5/16" x 1" SS304

3x BOTTOM




#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304

NOTE: This mounting preparation is for ladder rack without 3rd crossbow ladder rack only.

2.2.2 Mounting tracks preparation for ladder rack without 3rd crossbow.

Ranger Design Tracks


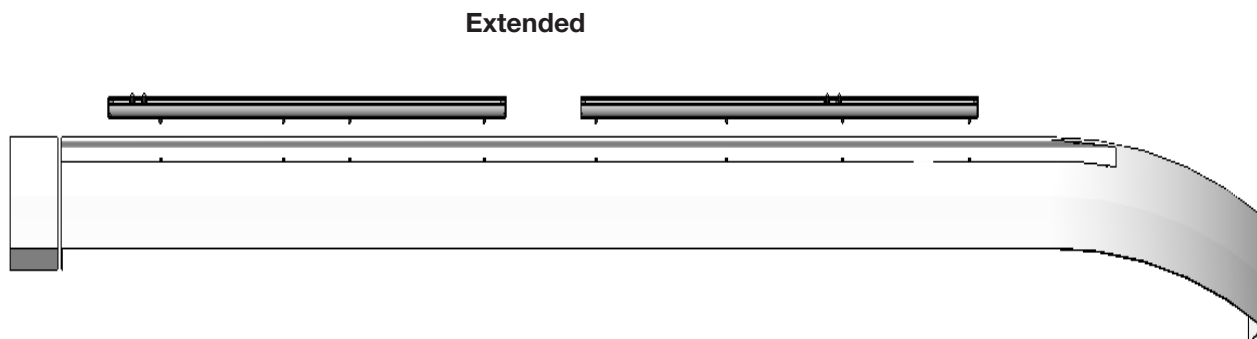


2x

Slide bolts on top and bottom side of the mounting tracks, then attach the end caps on both ends of the mounting tracks.

Rear

Front

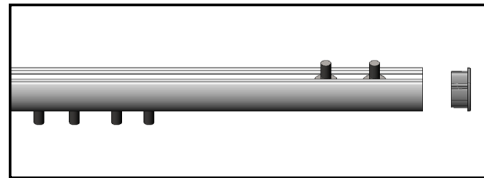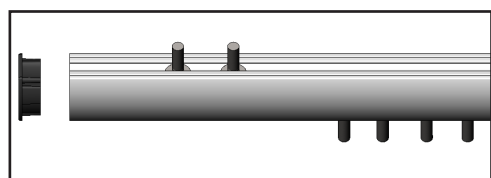

HARDWARE USED

2x TOP



#90-487 Carriage Bolt
5/16" x 3/4" SS304

4x BOTTOM



#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304

HARDWARE USED

2x TOP



#90-487 Carriage Bolt
5/16" x 3/4" SS304

4x BOTTOM



#90-495 Hex Bolt
5/16" x 1 - 1/4" SS304



PHASE 2 – INSTALLATION

2.3 MOUNTING TRACKS INSTALLATION

Ranger Design Tracks

- 2.3.1**
- Remove the plugs on the roof holes, then apply a bead of silicone around each hole.
 - Put flat washers and neoprene spacers on the bottom bolts, then cut the plug extrusion into 8 pieces of 6" and attach one piece on both ends of the mounting tracks.
 - Align the bottom bolts to the roof holes, then install the mounting tracks onto the roof.

Regular

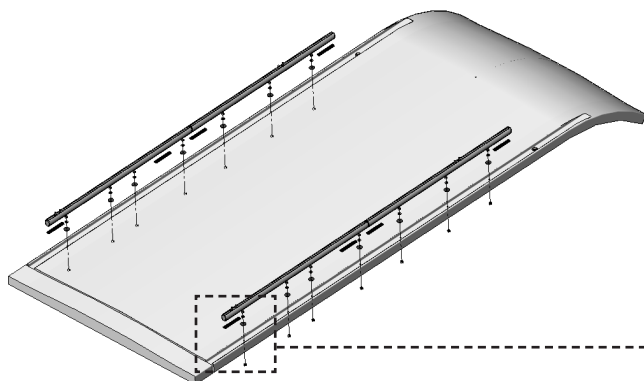

TOOLS

- ☐ Cordless Impact
- ☐ 1/2" Socket
- ☐ Knife

14x



#90-495 Carriage Bolt 5/16" x 1-1/4"



#98-109 Flat Washer





#98-149 Neoprene Spacer



#94-116 Serrated Nut

Extended

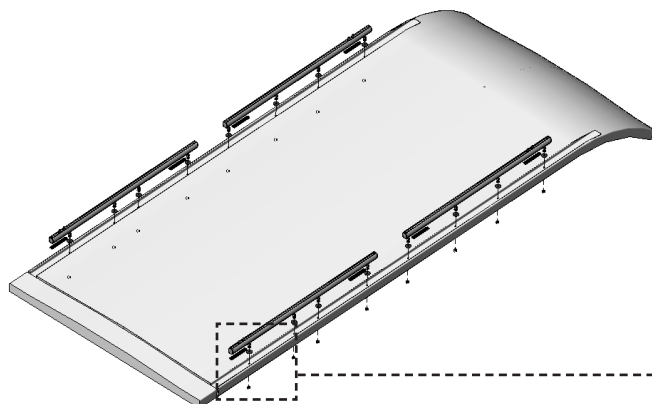

TOOLS

- ☐ Cordless Impact
- ☐ 1/2" Socket
- ☐ Knife

16x



#90-495 Carriage Bolt 5/16" x 1-1/4"



#98-109 Flat Washer



#98-149 Neoprene Spacer





#94-116 Serrated Nut

With OEM Tracks

2.3.2 Put bolts on the 2 middle holes of the support plates, then slide the plates on the ends of the OEM mounting tracks.

WARNING: If you have ladder rack 3rd crossbow slide 3 support plates each OEM mounting track.

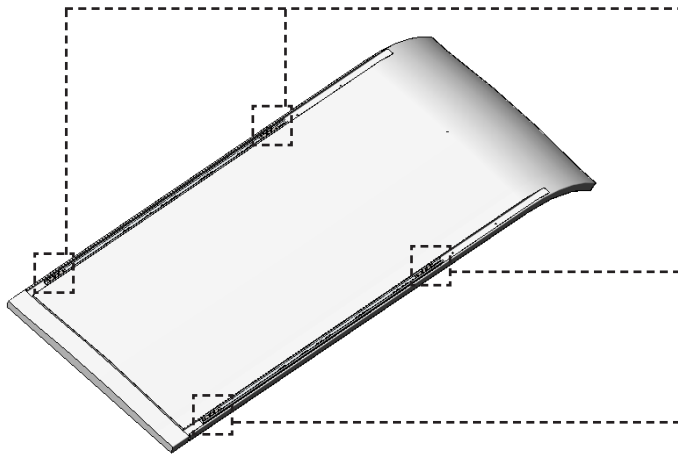

FASTENERS USED

8x



#90-491 Carriage Bolt 5/16" x 1"


PHASE 2 – INSTALLATION

2.4 LADDER RACK INSTALLATION

2.4.1 Position the Ladder Rack (**minimum two persons**) on the vehicle so that the feet are on the tracks.

NOTE: If you do not have a hoist, lift the ladder rack onto the roof manually.

Ladder Rack

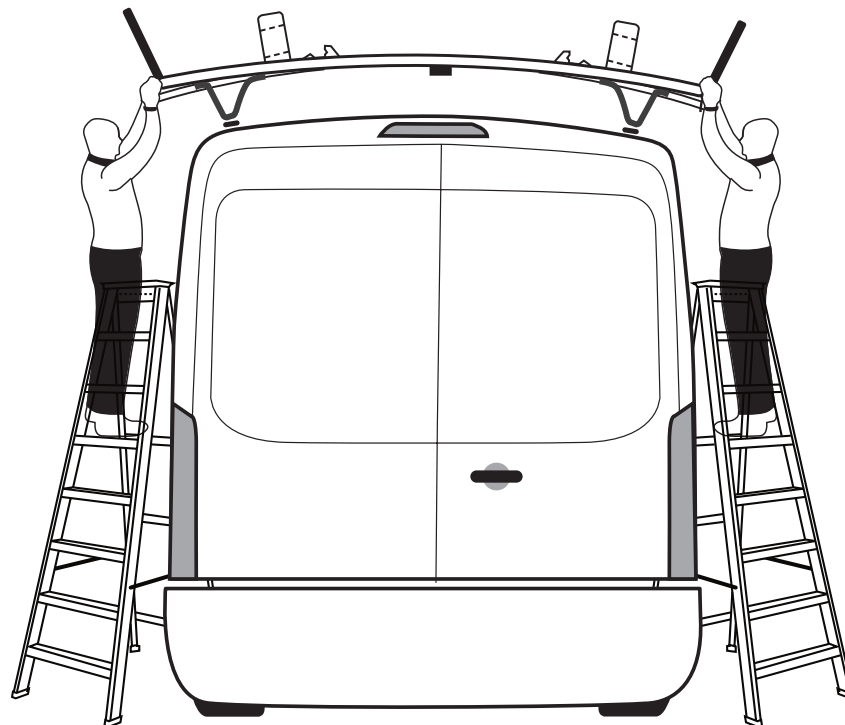


2.4.2 While making sure the crossbows are parallel to each other, slide the rack to the appropriate position, then attach all the “V” feet to the mounting tracks.


NOTE:

- If you have a third crossbow, center the third crossbow between the front and rear crossbows.
- Use the third crossbow install faster kit for the third crossbow feet installation.


THIRD CROSSBOW

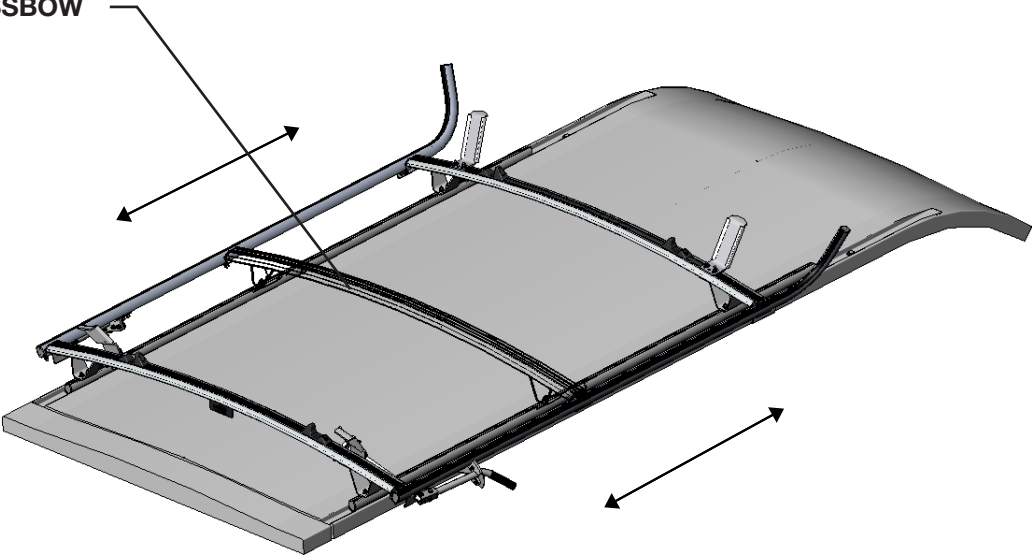

Ranger Design Tracks

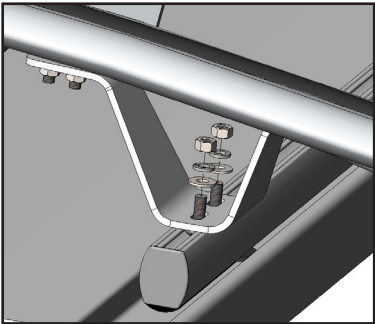

With OEM Tracks

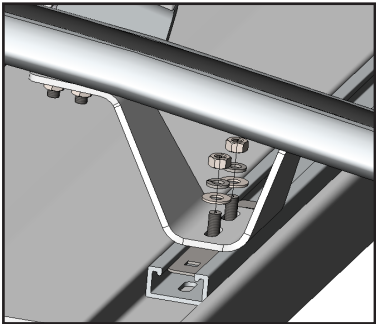

TOOLS

- ☐ Ratchet
- ☐ 1/2" Socket
- ☐ Tape Measure

FASTENERS USED

8x





- Carriage bolts are already on the tracks or plates
- #98-117 Flat Washer
- #98-123 Lock Washer
- #94-105 Hex Nut

2.4.3 Center the crossbows on the vehicle, then tighten all the “V” feet to the crossbows.

NOTE: If you have a third crossbow, center the third crossbow between the front and rear crossbows.

THIRD CROSSBOW

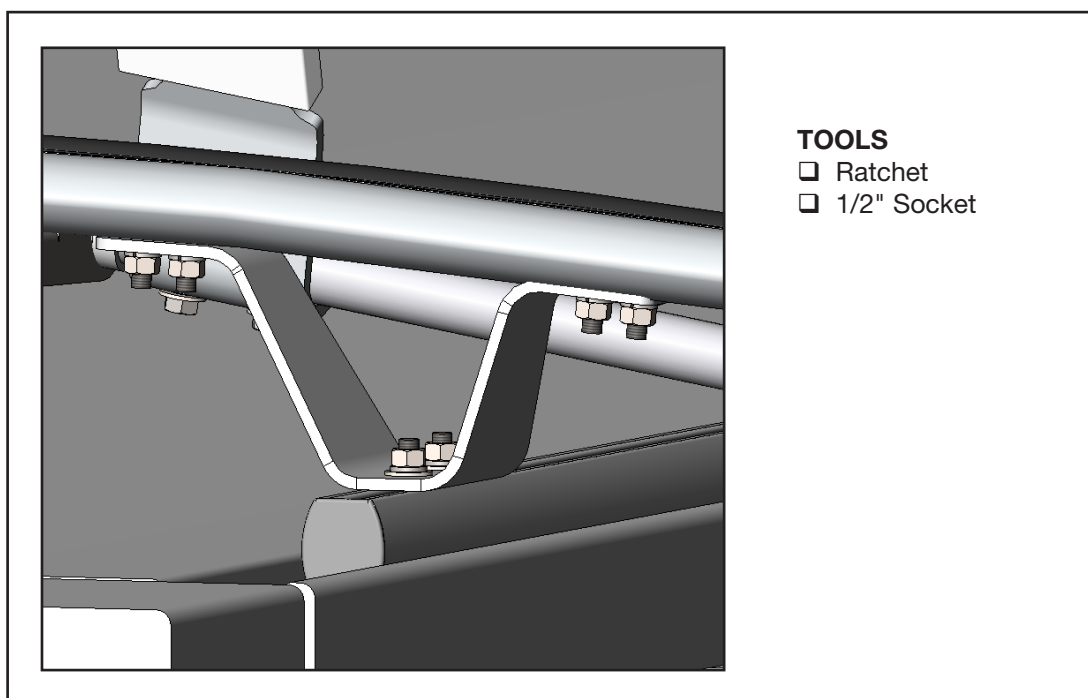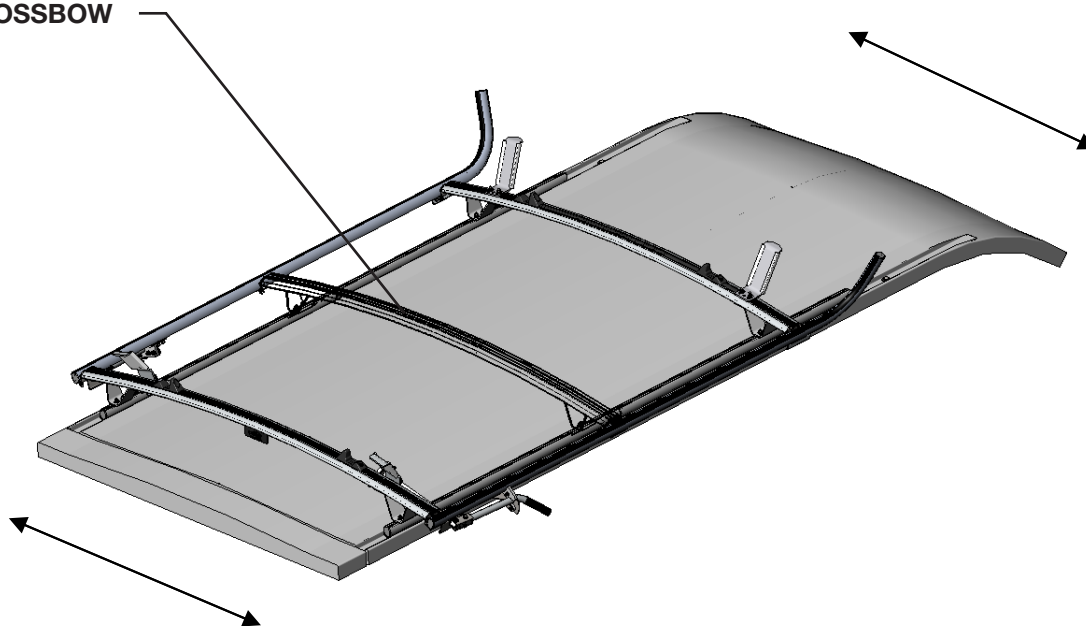

2.4.4 Ladder Rack adjustment for extension ladder.



NOTE:

- Do this step on both sides.
- The ladder cannot extend beyond the rear bumper of the vehicle.

IMPORTANT:

- After installation is complete, cut the track plug underneath the crossbows to fill all the unused space.
- Place the ladder rack warning label on a visible area, recommended on a partition.


THIRD CROSSBOW

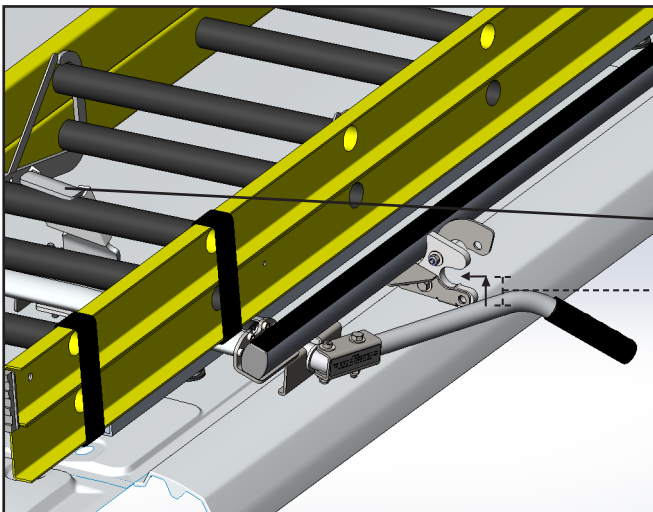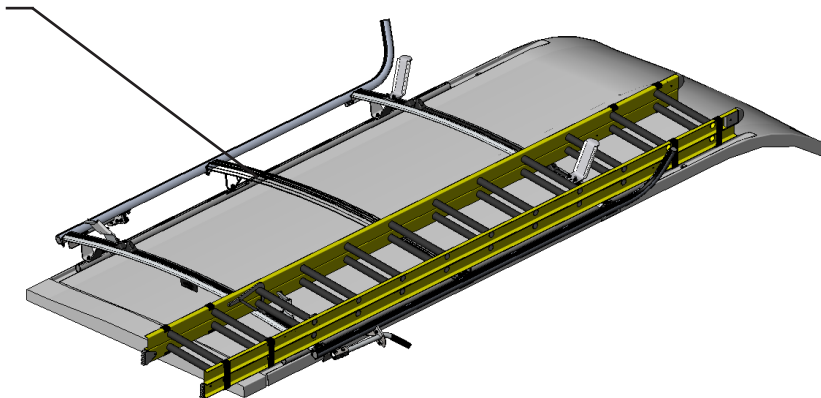

When the rear hook touches the ladder, the handle should be 1" below the ladder clamp hasp.

REAR HOOK

1"

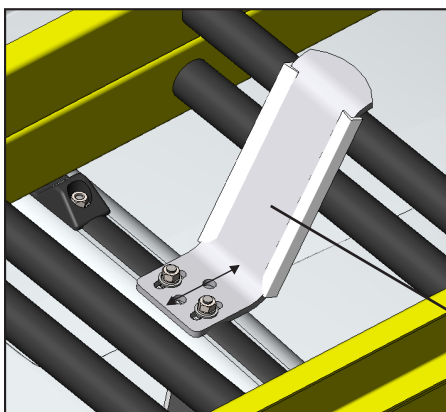

Now adjust the front hook to be snug against the ladder rung and tighten the bolts on the front crossbow.

TOOLS



- ☐ Cordless Impact
- ☐ 1/2" Socket

FRONT HOOK

PHASE 2 – INSTALLATION

2.5 NOTE


2.5.1 If the handle is interfering with the door or roof of the vehicle, the handle can be installed in an alternate position.

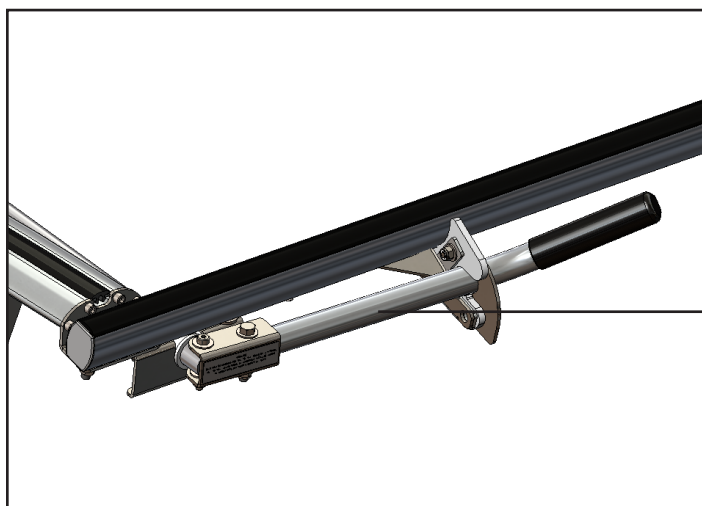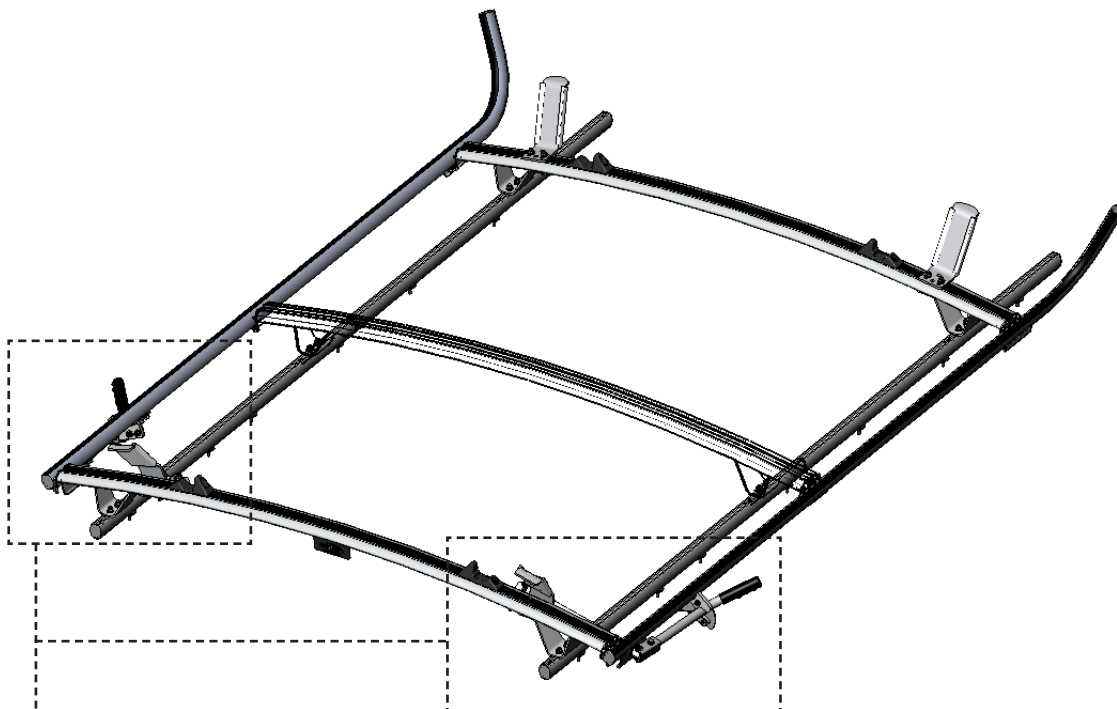

If the handle is interfering with the door or roof of the vehicle, disassemble the handle, then assemble it in an alternate position as shown.

Handle

THIRD CROSSBOW

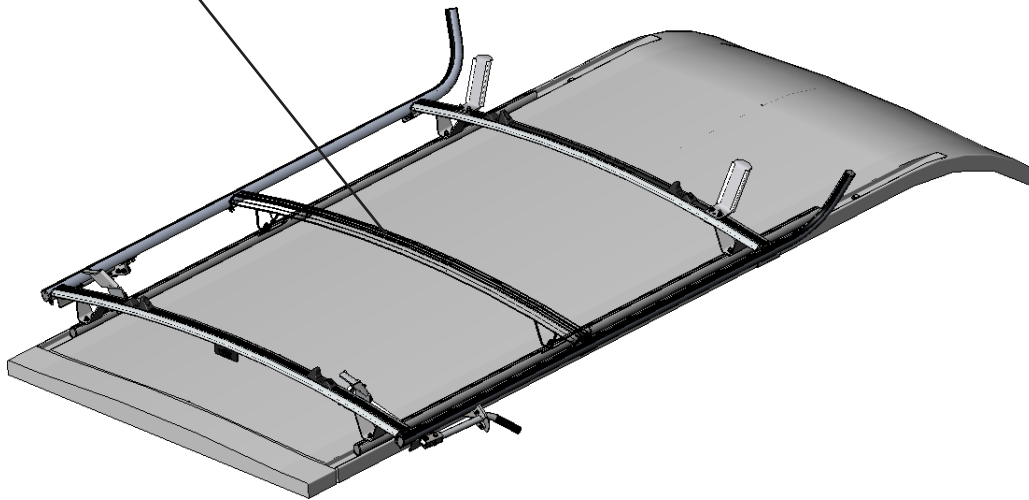

**“You have successfully installed your
Ladder Rack**

Thank you for doing business with us.”

For any feedback or suggestions you may have, please contact: cs@rangerdesign.com



INSTALLATION GUIDE



15-U2574 THIRD CROSSBOW

Sprinter Universal Wheelbase (Aluminum)



LADDER RACK WITH THIRD CROSSBOW



Combination Ladder Rack



Double Clamp Ladder Rack




QUICK START GUIDE

Phase 1 - Assembly

❑ 1.1 Setup.....	4 - 5
❑ 1.2 Third Crossbow Assembly.....	6 - 7

REQUIRED ITEMS

NOTE: Use Sawhorses if possible, or use the box as a flat protective surface on the ground or table.



**2
PERSONS**

- ❑ Sawhorse (Optional)
- ❑ Box

PHASE 1 – ASSEMBLY

1.1 SETUP

1.1.1 Unpack components; compare with the bill of materials.



1.1.2 Verify all parts are present.

BILL OF MATERIALS





Item No.	Description	Qty.
10-464	"V" Foot	2
10-725	Support Plate (For OEM tracks only)	2
15-2573	Third Crossbow	1
94-1016	Assembly Fastener Kit	1
96-1020	Install Fastener Kit	1

1.1.3 Fastener kits.



94-1016 Fastener Kit





Fastener Assembly

- 12x  # 90-491 Carriage Bolt 5/16"-18 x 1" SS304
- 12x  # 94-105 Hex Nut 5/16"-18 SS316wax
- 12x  # 98-117 Flat Washer 5/16", O.D 3/4" SS18-8
- 12x  # 98-123 Lock Washer Regular 5/16" SS304


8x FOR THIRD CROSSBOW ASSEMBLY

-  #90-491 Carriage Bolt 5/16" x 1"
-  #98-117 Flat Washer
-  #98-123 Lock Washer
-  #94-105 Hex Nut





4x FOR THIRD CROSSBOW TO LADDER RACK

-  #90-491 Carriage Bolt 5/16" x 1"
-  #98-117 Flat Washer
-  #98-123 Lock Washer
-  #94-105 Hex Nut

96-1020 Fastener Kit



Fastener Assembly

- 4x  # 90-491 Carriage Bolt 5/16"-18 x 1" SS304
- 4x  # 94-105 Hex Nut 5/16"-18 SS316wax
- 4x  # 98-117 Flat Washer 5/16", O.D 3/4" SS18-8
- 4x  # 98-123 Lock Washer Regular 5/16" SS304

4x FOR FEET TO MOUNTING TRACK

-  #90-491 Carriage Bolt 5/16" x 1"
-  #98-117 Flat Washer
-  #98-123 Lock Washer
-  #94-105 Hex Nut


PHASE 1 – ASSEMBLY

1.2 THIRD CROSSBOW ASSEMBLY



1.2.1 Slide carriage bolts on the bottom face of the crossbow.

NOTE: The track plug must be removed from the underneath of the crossbow, and reinstalled after the feet have been installed in the final position.

TIPS: Use tape to keep the bolts from sliding off.

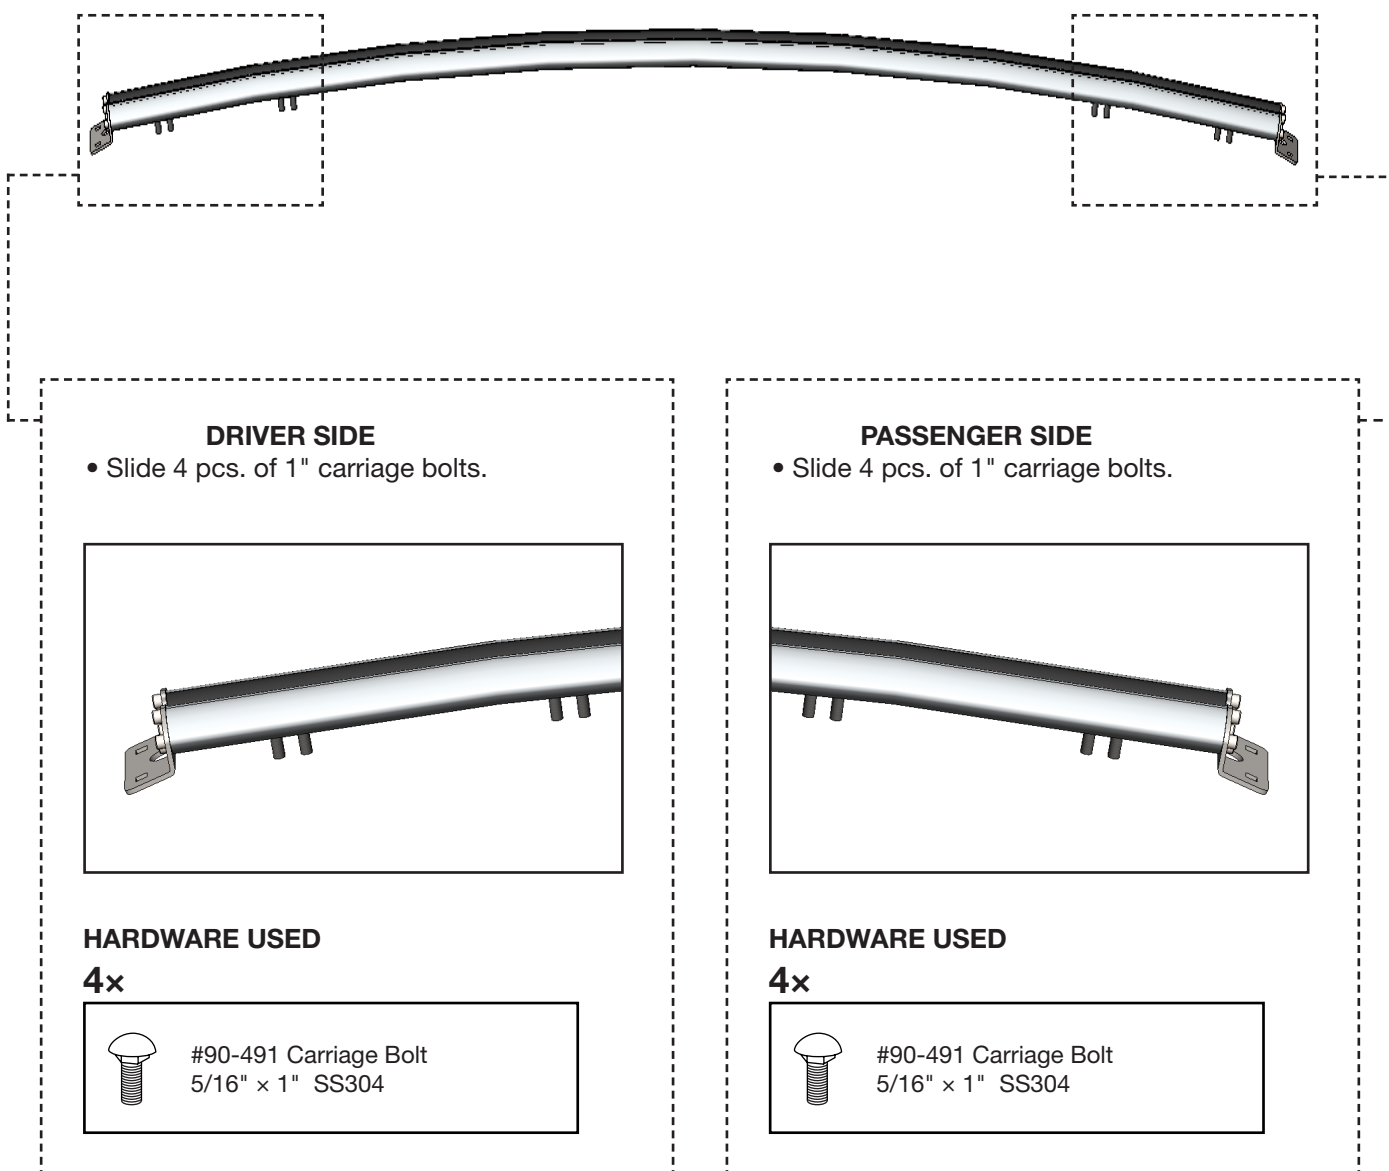

1.2.2 Install the feet on the crossbow.

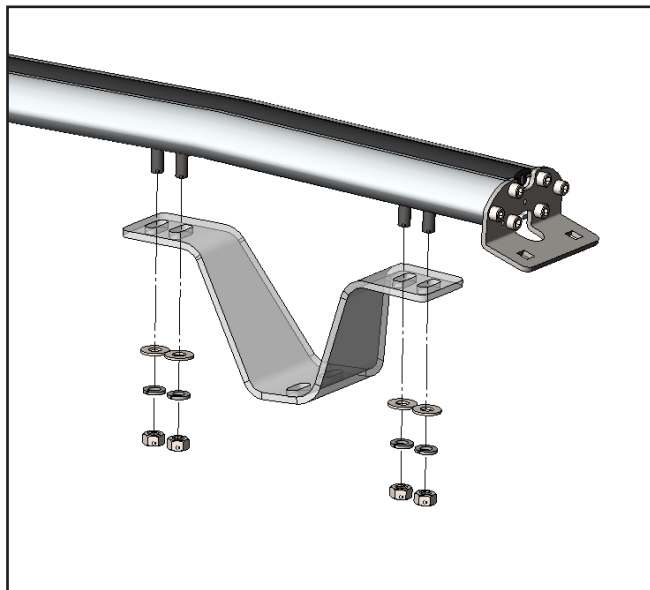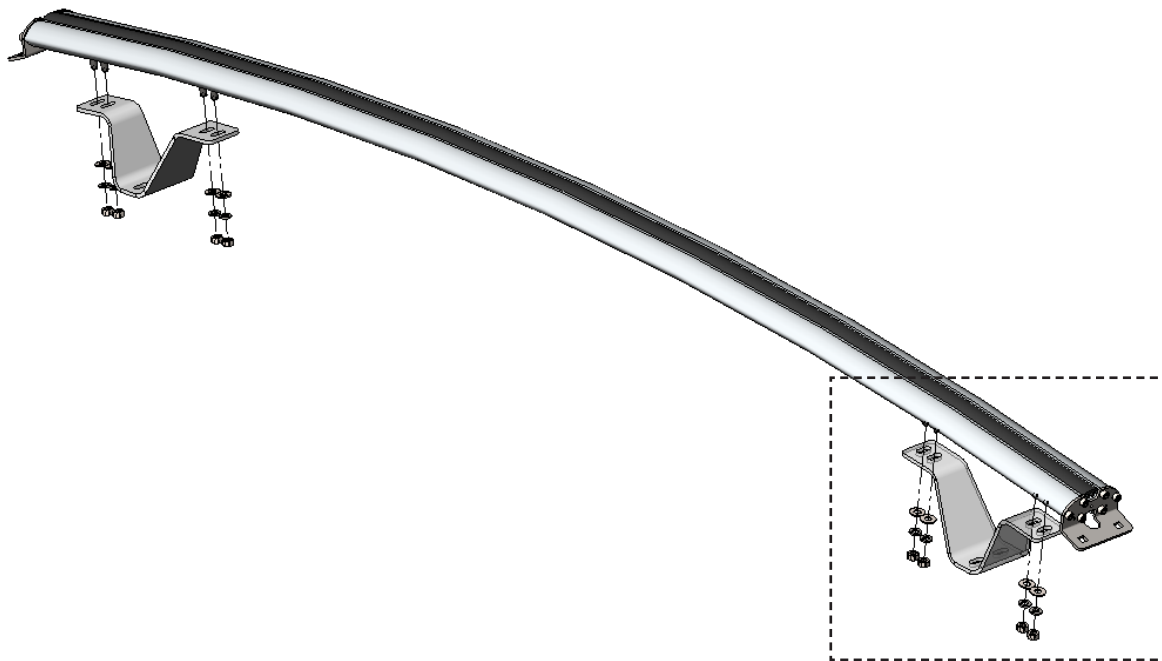

HARDWARE USED

8x HAND-TIGHTEN THE NUTS.



Carriage bolts are already on the crossbows.



#98-117 Flat Washer



#98-123 Lock Washer



#94-105 Hex Nut



**“You have successfully assembled your
Third Crossbow**

**Your third crossbow is now ready to be incorporated into the ladder rack
installation, please return to the install guide to complete installing your
ladder rack.”**

For any feedback or suggestions you may have, please contact: cs@rangerdesign.com

